





why choose Pimasa?

At Pinturas Pimasa we produce acrylic paints and coatings for professionals, distinguished by their functionality, ease of use, quality and durability.

Our first steps in the sector date back to 1958 with the development of vegetable glue, copal varnish, tempera paste, and putty in a same small 300 square meter nave on the outskirts of Albacete. In 1970 we began to produce acrylic paints and coatings.

In 1985, due to product growth and an increase in scales, we established Pinturas Pimasa, S.L. by moving to a new factory located in the Campollano Industrial Park in Albacete.

In 2016 we expanded and modernised our factory, aimed at growth of our production capacity, research, product and process development and a commitment to the environment.

At Pinturas Pimasa we assist our customers with the very best service and solutions.

***Our fast service
and direct
contact with
customers
and suppliers
sets us apart.***

***Our products are
distinguished
by offering the
best quality-cost
relationship
on the market.***

interior matte paint



*industrial
matte*

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of interior surfaces.

FEATURES

Excellent adhesion on cement, concrete, brick and other construction materials.

Stable white, not yellow.

Well-balanced whiteness, for protection of indoor walls.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 6-12 m²/l

SIZE: 4-15 l

interior matte paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of interior surfaces.

FEATURES

Excellent adhesion on cement, concrete, brick and other construction materials.
Breathable.
Stable white, not yellow.
Well-balanced whiteness, for protection of indoor walls.
Good resistance to scrubbing.
Easy application.

matte 2001

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 6-12 m²/l

SIZE: 4-15 l

interior matte paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of interior surfaces.

FEATURES

Excellent adhesion on cement, concrete, brick and other construction materials.
Breathable.
Stable white, not yellow.
Well-balanced whiteness, for protection of indoor walls.
Permissible wet scrub resistance.
Easy application.

interior matte

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 6-10 m²/l

SIZE: 4-15 l

interior matte paint



Pimaluz

DESCRIPTION

Matte acrylic paint based on special acrylic resins in a watery dispersion with highly-resistant pigments and light fastness what allows the paint to glow in the dark.

Ideal for decoration and protection of interior surfaces.

FEATURES

Excellent adhesion on cement, concrete, brick and other construction materials.

Luminescent paint that shines in the absence of light.

Very balanced paint for the protection of interior walls.

High resistance to wet rubbing.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Yellow in the dark

RECOAT TIME: 2-4 hours

COVERAGE: 6-10 m²/l

SIZE: 4-15 l

interior matte paint



Pimasa neutral

DESCRIPTION

Matte acrylic paint based on special acrylic resins in watery dispersion, high resistance pigments and light fastness and special additives that give the paint odorless property.

FEATURES

Excellent adhesion on cement, concrete, brick and other materials used in construction.

Ideal for decoration and protection of interior surfaces that need to be inhabited immediately.

Breathable.

Stable white, no yellowing.

Very balanced paint in whiteness, for the protection of interior walls.

Resistance to wet rubbing over 8,000 cycles.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 6-10 m²/l

SIZE: 4-15 l

interior matte paint



DESCRIPTION

Matt acrylic paint based on acrylic resins in aqueous dispersion, special pigments of high resistance and light fastness and nanotechnology which give the paint properties of thermal insulation, acoustic and anti-condensation.

FEATURES

Excellent adhesion on cement, concrete, brick and other materials used in construction.

Breathable.

Ideal for the decoration and protection of interior surfaces to which we would like to provide a barrier against temperature variation, as well as providing great protection against humidity and condensation.

Stable white, no yellowing.

Very balanced paint in whiteness, for the protection of interior walls.

Resistance to wet rubbing over 8,000 cycles.

Easy application.

Pimatermic

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 4-6 m²/l

SIZE: 4-15 l

interior matte paint



Pimaeco

DESCRIPTION

Matte acrylic paint based on acrylic-vinyl resins in a watery dispersion and pigments of high resistance and light fastness, which gives the paint a minimum environmental impact and protects health because the VOC's emissions from the paint are almost non-existent.

Ideal for decorating and protecting interior surfaces.

FEATURES

Excellent adhesion on cement, concrete, brick and other materials used in construction.

Ideal for decorating and protecting interior surfaces such as schools, hospitals, etc. Breathable.

Stable white, no yellowing.

Very balanced paint in whiteness, for the protection of interior walls.

Resistance to wet rubbing over 8,000 cycles.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 8-10 m²/l

SIZE: 4-15 l

interior matte paint



*one coat
of colours*

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of interior surfaces.

FEATURES

Great covering power.
Colors as available.
Excellent adhesion on cement, concrete, brick and other construction materials.
Breathable.
Well-balanced in covering and washability for protection of indoor walls.
Good washability.
Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: One coat colours chart


RECOAT TIME: 2-4 hours

COVERAGE: 8-10 m²/l

SIZE: 4-15 l

discover our colours

ONE COAT INTERIOR COLOURS



CREAM



VANILLA



BEIGE




WENGUE



SAND YELLOW



ALBERO



SALMON




PEACH



TANGERINE



ORANGE



PALE PINK



CHERRY



FLAMING RED




PLUM



MAUVE



PETUNIA FUCHSIA



PISTACHIO



DAYDREAM GREEN



GREY



SKY BLUE



CALM BLUE

interior and exterior matte paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of interior surfaces.

FEATURES

Good covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Stable white, not yellow.

Resistance to wet scrub above 2,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor walls and permissible for exteriors.

Easy application.

matte2002

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 8-12 m²/l

SIZE: 4-15 l

interior and exterior matte paint



matte 1900
mould-resistant

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness, as well as mould-resistance due to special composition and additive.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Good covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a highly mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 4,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 8-12 m²/l

SIZE: 4-15 l

interior and exterior matte paint



pimacril

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Great covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 4,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior matte paint



albacril

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Great covering power.
Excellent adhesion on cement, concrete, brick and other construction materials.
Breathable.
Completely waterproof and UV-resistant.
Forms a mould-resistant film.
Stable white, not yellow.
Resistance to wet scrub above 4,500 cycles.
Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.
Excellent washability.
Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 8-12 m²/l

SIZE: 4-15 l

interior and exterior matte paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Great covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 5,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

high covering

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior matte paint



pimalux

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Great covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 5,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior matte paint



pimalux
mould-resistant

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness, as well as mould-resistance due to special composition and additive.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Great covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a highly mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 5,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes


COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior matte paint

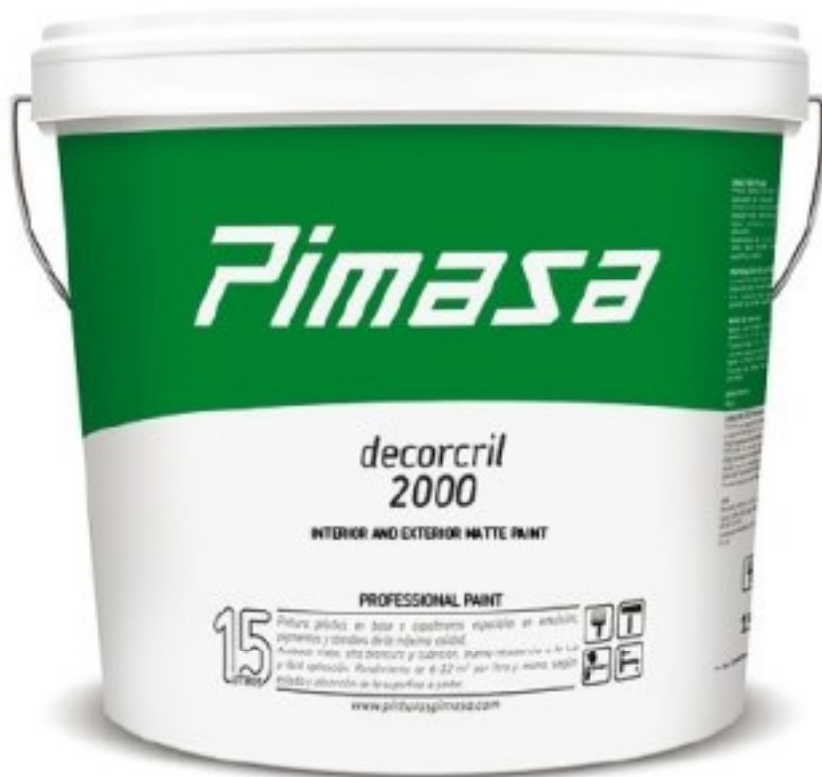

Decorcril 2000

DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Excellent covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 6,000 cycles.

Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.

Excellent washability.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 10-12 m²/l

SIZE: 4-15 l

interior and exterior matte paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

- Excellent covering power.
- Maximum whiteness.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof and UV-resistant.
- Forms a mould-resistant film.
- Stable white, not yellow.
- Resistance to wet scrub above 6,000 cycles.
- Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.
- Excellent washability.
- Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

Super 5000

interior and exterior matte paint



DESCRIPTION

Semi-matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

- Excellent covering power.
- Silky finish.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof and UV-resistant.
- Forms a mould-resistant film.
- Stable white, not yellow.
- Resistance to wet scrub above 6,000 cycles.
- Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.
- Excellent washability.
- Easy application.

matte silk

FINISH: Semi Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 10-12 m²/l

SIZE: 4-15 l

interior and exterior satin paint



DESCRIPTION

High-quality satin acrylic paint based on copolymer resins in watery dispersion and high-resistance and stable pigments that provide waterproof, durable, washable and opaque finishes.

It offers a nice decorative look with satin effect.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Good covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Weather-proof and UV-resistant.

Stable white, not yellow.

Resistance to wet scrub above 10,000 cycles.

Well-balanced whiteness, covering and washability, with adequate time for retouching.

Easy application.

1000-HU

FINISH: Satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior satin paint



DESCRIPTION

High-quality satin acrylic paint based on copolymer resins in watery dispersion and high-resistance and stable pigments that provide waterproof, durable, washable and opaque finishes.

It offers a nice decorative look with satin effect.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

Very good covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Weather-proof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 10,000 cycles.

Well-balanced whiteness, covering and washability, with adequate time for retouching.

Excellent washability.

Easy application.

1000-MUX

FINISH: Satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior satin paint



satilux

DESCRIPTION

High-quality satin acrylic paint based on copolymer resins in watery dispersion and high-resistance and stable pigments that provide waterproof, durable, washable and opaque finishes.

It offers a nice decorative look with satin effect.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

High-gloss acrylic paint.

Excellent covering power.

Completely waterproof.

Excellent adhesion on cement, concrete, brick and other construction materials.

Weather-proof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 10,000 cycles.

Well-balanced whiteness, covering and washability, with adequate time for retouching.

Excellent washability.

Easy application.

FINISH: Satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

interior and exterior satin paint



DESCRIPTION

High-quality satin acrylic paint based on copolymer resins in watery dispersion and high-resistance and stable pigments that provide waterproof, durable, washable and opaque finishes.

It offers a nice decorative look with satin effect.

Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

High-gloss acrylic paint.

Excellent covering power.

Completely waterproof.

Excellent adhesion on cement, concrete, brick and other construction materials.

Weather-proof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 10,000 cycles.

Well-balanced whiteness, covering and washability, with adequate time for retouching.

Excellent washability.

Easy application.

satin extra

FINISH: Satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

facades paint



R-520

DESCRIPTION

Smooth matte coating based on acrylic resins in watery dispersion and high-strength, quality and light fast pigments.
Ideal for decoration and protection of both interior and exterior surfaces.

FEATURES

- Good covering power.
- Maximum whiteness.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof and UV-resistant.
- Stable white, not yellow.
- Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.
- Excellent washability.
- Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2-4 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

facades paint



revescril

DESCRIPTION

Smooth matte coating based on high-strength acrylic resins with weather-proof and light fast ingredients.

Ideal for decoration and long-term protection for all kinds of facades.

FEATURES

Great covering power.

Maximum whiteness.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Sufficiently permeable to water vapour to prevent internal condensation.

Self-cleaning.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

facades paint



d'okacril
mould-resistant

DESCRIPTION

Smooth matte coating based on high-strength acrylic resins with weather-proof and light fast ingredients, as well as mould-resistance due to special composition and additive.

Ideal for decoration and long-term protection for all kinds of facades.

FEATURES

Great covering power.

Maximum whiteness.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a highly mould-resistant film.

Stable white, not yellow.

Sufficiently permeable to water vapour to prevent internal condensation.

Self-cleaning.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

facades paint



DESCRIPTION

Matte smooth coating based on special acrylic resins and pigments of high resistance to the weather and complete light fastness, as well as special additives that give the water-repellent costing and mould resistant. Ideal for decorating and protecting all types of facades over a long period of time.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Hydrophobic
- Impermeable to water and impenetrable by ultraviolet rays.
- It forms a film of great resistance to the appearance of mould.
- Stable white, no yellow..
- Sufficiently permeable to water in vapour phase, to avoid internal condensation.
- Self-cleaning.
- Easy to application.

Water-repellent coating

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2 hours

COVERAGE: 8-12 m²/l

SIZE: 4-15 l

facades paint



decotex

DESCRIPTION

Smooth matte coating based on high-strength acrylic resins with weather-proof and light fast ingredients.

Ideal for decoration and long-term protection for all kinds of facades.

FEATURES

Excellent covering power.

Maximum whiteness.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Forms a mould-resistant film.

Stable white, not yellow.

Resistance to wet scrub above 15,000 cycles.

Wide range of resistance, for both climatic weather variables and different bracket protection conditions.

Completely smooth, without frosted feel.

Sufficiently permeable to water vapour to prevent internal condensation.

Self-cleaning.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 2 hours

COVERAGE: 9-13 m²/l

SIZE: 4-15 l

facades paint



Decotex colours

DESCRIPTION

Smooth matte coating based on high-strength acrylic resins with weather-proof and light fast ingredients.

Ideal for decoration and long-term protection for all kinds of facades.

FEATURES

Excellent covering power.

Colors as available.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Completely waterproof and UV-resistant.

Completely smooth, without frosted feel.

Sufficiently permeable to water vapour to prevent internal condensation.

Self-cleaning.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Decotex colours chart

RECOAT TIME: 2 hours

COVERAGE: 10-12 m²/l

SIZE: 4-15 l

discover our colours

DECOTEX FACADES COLOURS



DARK SALMON



ALBERO



PALE GREY



SALMON



DARK BEIGE



DARK GREY



LEATHER



STONE SALMON



CINNAMON



ATLAS




SANDSTONE



DUNE




IVORY



CLAY



ALMOND



PALE BEIGE



MOSS GREEN



DARK BLUE



YELLOW



RUST RED

facades paint



DESCRIPTION

Semi-satin waterproof elastic coating based on acrylic copolymers in emulsion with weather-proof and light fast ingredients. Ideal for decoration and protection of infiltrations caused by rain for all types of facades.

FEATURES

- Great covering power.
- Maximum whiteness.
- Very high tensile strength, while still flexible, covers micro-cracks caused by contraction and expansion.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Stable white, not yellow.
- Sufficiently permeable to water vapour to prevent internal condensation.
- Self-cleaning.
- Easy application.

pimaelast

FINISH: Semi-satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 6 hours

COVERAGE: 3,5-4 m²/l

SIZE: 4-15 l

facades paint



pimaelast
mould-resistant

DESCRIPTION

Semi-satin waterproof elastic coating based on acrylic copolymers in emulsion with weather-proof and light fast ingredients, as well as mould-resistance due to special composition and additive.

Ideal for decoration and protection of infiltrations caused by rain for all types of facades.

FEATURES

Great covering power.

Maximum whiteness.

Very high tensile strength, while still flexible, covers micro-cracks caused by contraction and expansion.

Excellent adhesion on cement, concrete, brick and other construction materials.

Forms a highly mould-resistant film.

Stable white, not yellow.

Sufficiently permeable to water vapour to prevent internal condensation.

Self-cleaning.

Easy application.

FINISH: Semi-satin

DRY TIME: 30 minutes

COLOUR: White

RECOAT TIME: 6 hours

COVERAGE: 3,5-4 m²/l

SIZE: 4-15 l

waterproof paint



red

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 450% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 25 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: Red

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



white

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 450% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 25 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: White

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



grey

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 450% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 25 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: Grey

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



red
heavy coat

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 30 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: Red

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



white
heavy coat

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 30 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: White

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



grey
heavy coat

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 30 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: Grey

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Tensile strength of 30 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

transparent heavy coat

FINISH: Satin

DRY TIME: 1-2 hours

COLOUR: Transparent

RECOAT TIME: 12-24 hours

COVERAGE: 1,5-2 m²/l

SIZE: 4-15 l

waterproof paint



*red
with fiber*

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof.
Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Greater tensile strength by the incorporation of fiber.

Tensile strength of 35 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 4-8 hours

COLOUR: Red

RECOAT TIME: 14-16 hours

COVERAGE: 1-1,5 m²/l

SIZE: 4-15 l

waterproof paint



*white
with fiber*

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Greater tensile strength by the incorporation of fiber.

Tensile strength of 35 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 4-8 hours

COLOUR: Wite

RECOAT TIME: 14-16 hours

COVERAGE: 1-1,5 m²/l

SIZE: 4-15 l

waterproof paint



**grey
with fiber**

DESCRIPTION

Waterproof non-asphalt satin paint based on acrylic copolymers in emulsion. Once dry it forms a genuine rubber film, completely waterproof. Ideal for waterproofing terraces, rooftops, roofs, etc.

FEATURES

Completely waterproof.

Breathable.

The film formed is permeable to air and water vapour, allowing for breathing support.

Extraordinary elasticity, greater than 550% elongation.

Neither cracks nor fissures with movement.

Resistance to aging, to weathering and UV rays.

Excellent adhesion to all types of construction materials, such as concrete, brick, cement, fibre cement, metal, etc.

Greater tensile strength by the incorporation of fiber.

Tensile strength of 35 Kg/cm².

Its extreme adherence and penetration in cracks and pores as well as its elasticity make it perfect for supporting expansion and contraction without cracking or peeling.

Easy application.

FINISH: Satin

DRY TIME: 4-8 hours

COLOUR: Grey

RECOAT TIME: 14-16 hours

COVERAGE: 1-1,5 m²/l

SIZE: 4-15 l

sports paint



DESCRIPTION

Matte acrylic paint based high-resistance and light fast acrylic copolymers. Ideal for tennis courts and other sporting facilities.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof.
- Weather-proof and UV-resistant.
- Stable color.
- Does not give off odours hazardous to health.
- Film thickness of 100-150 microns when wet and 35-50 microns when dry, depending on the type and condition of surface, absorption, mode of application and degree of paint dilution.
- Well-balanced color, covering and washability for protection of indoor and outdoor walls.
- Easy application.

tennis red

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Tennis red

RECOAT TIME: 3 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

sports paint



tennis green

DESCRIPTION

Matte acrylic paint based high-resistance and light fast acrylic copolymers. Ideal for tennis courts and other sporting facilities.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof.
- Weather-proof and UV-resistant.
- Stable color.
- Does not give off odours hazardous to health.
- Film thickness of 100-150 microns when wet and 35-50 microns when dry, depending on the type and condition of surface, absorption, mode of application and degree of paint dilution.
- Well-balanced color, covering and washability for protection of indoor and outdoor walls.
- Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Tennis green

RECOAT TIME: 3 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

sports paint



DESCRIPTION

Matte acrylic paint based high-resistance and light fast acrylic copolymers. Ideal for tennis courts and other sporting facilities.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof.
- Weather-proof and UV-resistant.
- Stable white, not yellow.
- Does not give off odours hazardous to health.
- Film thickness of 100-150 microns when wet and 35-50 microns when dry, depending on the type and condition of surface, absorption, mode of application and degree of paint dilution.
- Well-balanced whiteness, covering and washability for protection of indoor and outdoor walls.
- Easy application.

tennis white

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Tennis white

RECOAT TIME: 3 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

sports paint



DESCRIPTION

Matte acrylic paint based high-resistance and light fast acrylic copolymers. Ideal for tennis courts and other sporting facilities.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof.
- Weather-proof and UV-resistant.
- Stable color.
- Does not give off odours hazardous to health.
- Film thickness of 100-150 microns when wet and 35-50 microns when dry, depending on the type and condition of surface, absorption, mode of application and degree of paint dilution.
- Well-balanced color, covering and washability for protection of indoor and outdoor walls.
- Easy application.

tennis blue

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Tennis blue

RECOAT TIME: 3 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

sports paint



DESCRIPTION

Matte acrylic paint based high-resistance and light fast acrylic copolymers. Ideal for tennis courts and other sporting facilities.

FEATURES

- Great covering power.
- Excellent adhesion on cement, concrete, brick and other construction materials.
- Breathable.
- Completely waterproof.
- Weather-proof and UV-resistant.
- Stable color.
- Does not give off odours hazardous to health.
- Film thickness of 100-150 microns when wet and 35-50 microns when dry, depending on the type and condition of surface, absorption, mode of application and degree of paint dilution.
- Well-balanced color, covering and washability for protection of indoor and outdoor walls.
- Easy application.

fronton green

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Fronton green

RECOAT TIME: 3 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

sports paint



DESCRIPTION

Matte acrylic paint based on acrylic resins in a watery dispersion with highly-resistant pigments and light fastness.
Ideal for painting pools.

FEATURES

Great covering power.
Excellent adhesion on cement and concrete.
Breathable.
Completely waterproof.
Completely resistant to pool purification agents.
Alkali-resistant for brackets.
Fast drying with bactericide and algacide action.
Easy application.

pools

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Blue

RECOAT TIME: 2-4 hours

COVERAGE: 6-8 m²/l

SIZE: 4-15 l

miscellaneous



black matte

DESCRIPTION

Matte acrylic plastic paint based on acrylic resins in a watery dispersion and pigments of high resistance and light fastness.

Ideal for decorating and protecting interior surfaces.

FEATURES

Good covering power.

Excellent adhesion on cement, concrete, brick and other construction materials.

Breathable.

Stable black , not whiten.

Easy application.

FINISH: Matte

DRY TIME: 30 minutes

COLOUR: Black

RECOAT TIME: 2-4 hours

COVERAGE: 8-10 m²/l

SIZE: 4-15 l

miscellaneous



fixative primer

DESCRIPTION

High penetration acrylic primer for new or deteriorated substrates with the aim of improving adherence and uniformity of paint absorption.
Ideal for both interior and exterior surfaces.

CHARACTERISTICS

High fixing capacity.
Excellent adhesion on cement, concrete, brick and other construction materials.
High resistance to the alkalinity of the surfaces.
Fast drying and maximum adherence.
Easy application.
Dilution with water in a ratio of 1:5.

FINISH: Semi Matte

DRY TIME: 1 hour

COLOUR: White

RECOAT TIME: 8-12 hours

COVERAGE: 20-40 m²/l

SIZE: 4-15 l

Pimasa

www.pimasapaints.com

Parque Empresarial Campollano, calle D, 43 · 02007 Albacete Spain · T +34 967 218 528 · info@pinturaspimasa.com